



**cycloc**<sup>®</sup>  
beyond the bike

**HOBO**<sup>™</sup>

Introduction	3
Product features and benefits	4
Package Contents	5
Dimensions	6
Compatibility	7

## Introduction



### CYCLOC

#### Store your bike with style

Cycloc's unique ability to carefully combine considered thought with a twist of poetic spirit to create a range of simple, playful and practical products has earned it global recognition with numerous awards and accolades.

Founded in 2006, Cycloc operates from their design studio in London's creative East End and a manufacturing facility in the UK. A team of skilled and enthusiastic distributors and retailers provide support globally.


### HOBO

#### For hollow bottom brackets

- Perfect for race pit preparation, pre-ride adjustments and cleaning
- Pedal clearance allows crank to rotate
- Robust and rigid, formed from a single length of 32mm diameter steel tube
- Wide triangular base provides stability
- Ideal for servicing dropper posts, retail display and home storage
- 3 spacers supplied to suit your bottom bracket bore (12mm, 18mm and 20mm)



Product features and benefits

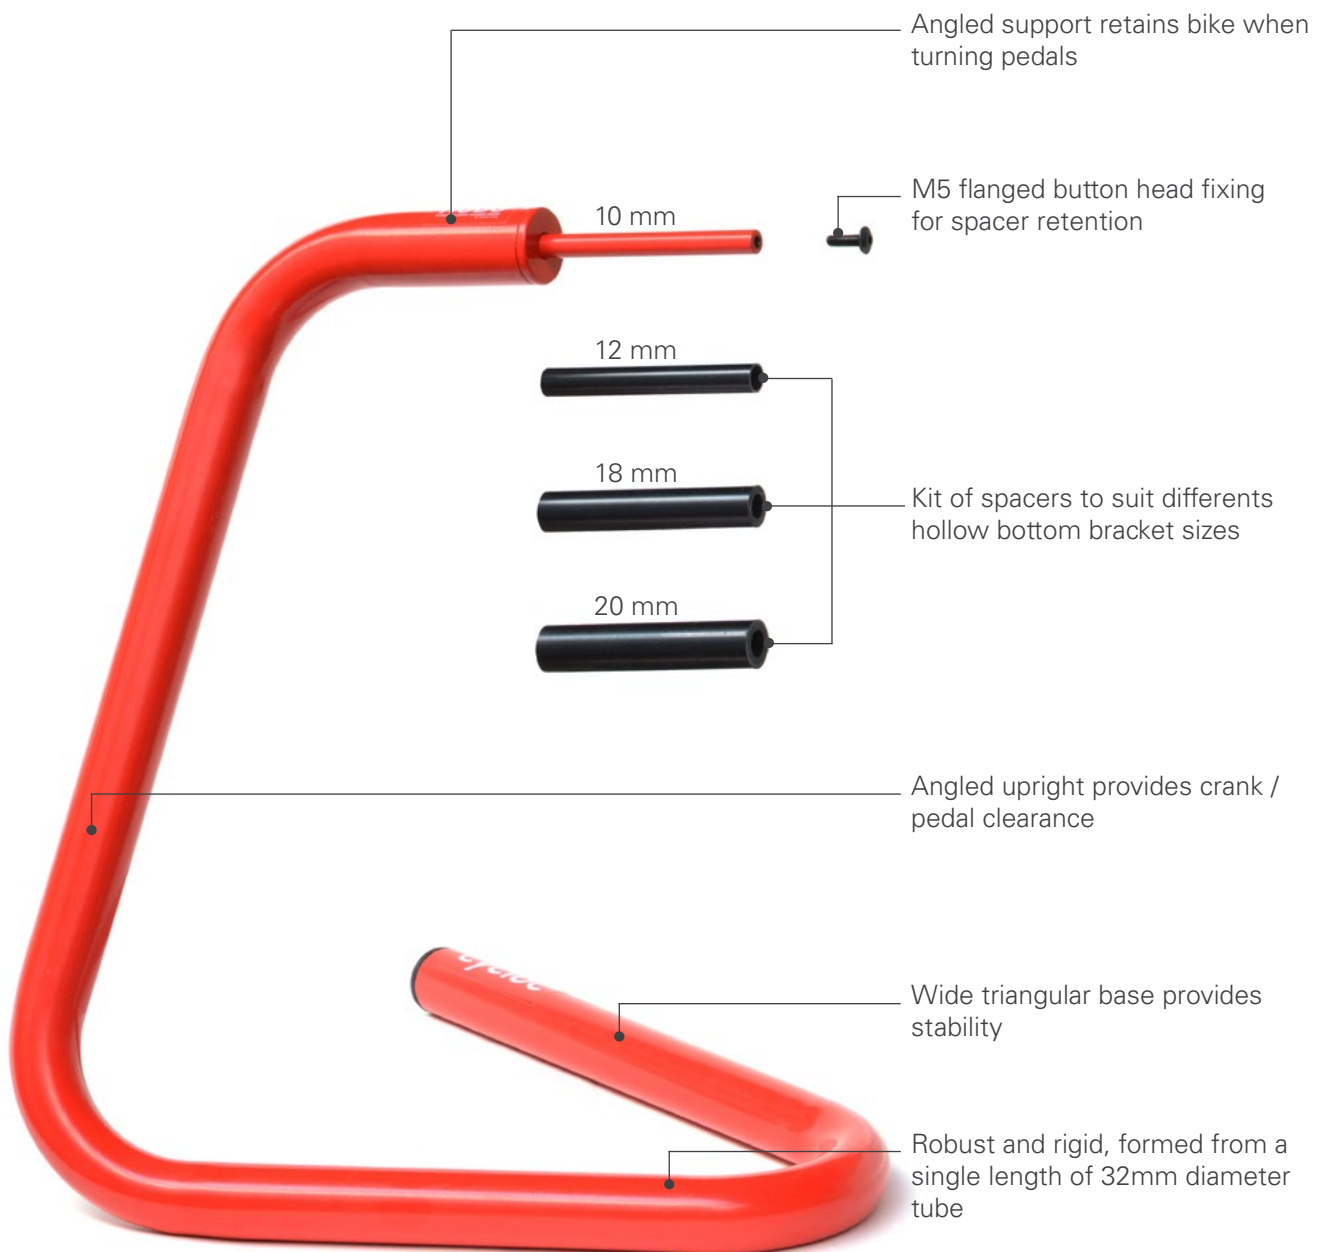

## Package contents

- x1 Hobo unit
- x3 Spacers (12mm, 18mm and 20 mm)
- x1 Flanged button head screw



Dimensions (in mm)



## Compatibility

Brand	Model	Compatibility
Cannondale	Hollowgram	✓
Campagnolo	Centaur (Power torque only) Athena (Power torque only) Veloce (Power torque only)	✓
	Super Record Record Chorus Potenza Pista	✗
E13	TRS base TRS plus TRS race TRS race SL LG1 base LG1 plus LG1 race	✓
FSA	K-Froce SLK Afterburner V-Drive Comet Gamma	✓
	Gimondi	✗
Praxis	Girder Turn	✓
	Lyft	✗
Raceface	Next SixC Turbine Atlas Affect	✓
	Respond Ride Chester Evolove Deus	✗

Brand	Model	Compatibility
Rotor	3D+ 3D Aglis Rex 1-3	✓
Shimano	XTR XT SLX Deore Acera Alivio M4000 series	✓
	Alivio M400 series (*M4000 series OK)	✗
SRAM	Red GXP S-952 Force S-902 Rival Apex Omnium BB/PF30	✓
Specialized	Sworcks MTB (Post 2016 only)	✓
Truvative	Descendant Stylo AKA	✓
	Hammerschmidt E400 E300 Hussefelt Holzfeller Ruktion	✗

### Note

This schedule is for guidance only. Crankset models and specifications continuously change. To ensure compatibility we advise users to check their crankset has a continuous through hole of at least 10.5mm diameter. Larger bore diameters can be accommodated simply by using one of the three spacer (12, 18, 20mm dia.) extrusions from the included Hobo Spacer Kit.